

PERFORMANCE




ON-X Sense

TP(a) Backlit Panel - 4000K

595mmx595mm - With Integral Bluetooth PIR Sensor

Technical

• Input Voltage	AC 200-240V
• Diffuser Type	Opal
• Beam Spread	90°
• CRI	>90
• Power Factor	>0.9
• Typical UGR	<19
• Materials	Aluminium
• Operating Temp.	0 to +40°C
• IP Rating	IP20
• Fire Rating	TP(a)
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	300Lm

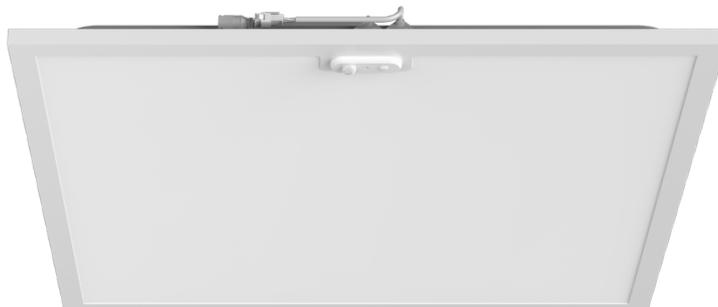

ON-X Sense Features



Integral PIR Sensor (Bluetooth Mesh)



TP(a) Fire Rating



Wattage Switchable



Microprismatic Diffuser Low Glare




3 Pin Push Connector As Standard

ON-X Sense


Part Code	Power	Efficacy	Output	Kelvin
OX-SENSE-WS-6X6NW/LG	20W	120Lm/cW	2400Lm	4000K
	22W	120Lm/cW	2640Lm	
	24W	120Lm/cW	2880Lm	
	26W	120Lm/cW	3120Lm	
	28W	120Lm/cW	3360Lm	
	30W	120Lm/cW	3600Lm	

Option	Option Code
3 Hour Emergency	+ /EM

Dimensions

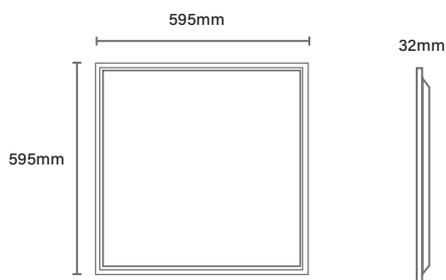

Photometric Data



Sensor Information



- Daylight Harvesting
- Occupancy Detection
- Time-Of-Day Dimming Schedule
- Energy Monitoring
- Light Level Stability
- Multi-Scene Control
- Optimum Mounting Height - 2.5m



SILVAIR
SilvaIR App Commissioned



EnOcean
En Ocean Switch Compatible