

ESSENTIAL



ON-X


Backlit Panel - Tri-Colour - 4000K - 6000K
1195mmx595mm

Technical

• Input Voltage	AC 200-240V
• Diffuser Type	Opal
• Beam Spread	110°
• CRI	>80
• Power Factor	>0.95
• Typical UGR	<19
• Materials	Aluminium
• Operating Temp.	-20 to +50°C
• IP Rating	IP40
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
• Emergency Output	300Lm



ON-X Features



ON-X Backlit Panel NW				
Part Code	Power	Efficacy	Output	Kelvin
OX-TPA-WS2-12X6NW	40W	120Lm/cW	3120Lm	4000K
	45W	120Lm/cW	3600Lm	
	50W	120Lm/cW	4560Lm	
OX-TPA-WS2-12X6CW	40W	120Lm/cW	3120Lm	6000K
	45W	120Lm/cW	3600Lm	
	50W	120Lm/cW	4560Lm	

Net Weight | 4kg

ON-X Tri-Colour Switchable				
Part Code	Power	Efficacy	Output	Kelvin
OX-TPA-WS2-12X6TC	40W	120Lm/cW	3120Lm	Tri-Colour: 3000K, 4000K & 5000K
	45W	120Lm/cW	3600Lm	
	50W	120Lm/cW	4560Lm	


Net Weight | 4kg

Option	Option Code
3 Hour Emergency	+ /EM
Dimming Options	See Below - Contact Office



SILVAIR CASAMBI

Dimensions

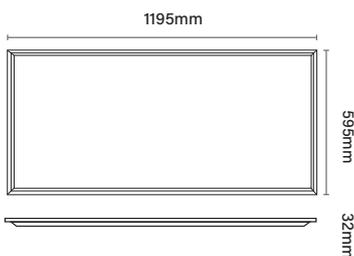

Photometric Data

