

ESSENTIAL



# ON-X


TP(a) Backlit Panel - Tri-Colour - 4000K - 6000K  
595mmx595mm

## Technical

• Input Voltage	AC 200-240V
• Diffuser Type	Opal/Microprismatic
• Beam Spread	110° / 90°
• CRI	>85
• Power Factor	>0.95
• Typical UGR	<19
• Materials	Aluminium
• Operating Temp.	-20 to +50°C
• IP Rating	IP40
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
• Emergency Output	300Lm



## ON-X Features



### ON-X Opal Diffuser

Part Code	Power	Efficacy	Output	Kelvin
OX-TPA-WS2-6X6NW	20W	120Lm/cW	2400Lm	4000K
	26W	120Lm/cW	3120Lm	
	30W	120Lm/cW	3600Lm	
OX-TPA-WS2-6X6CW	20W	120Lm/cW	2400Lm	6000K
	26W	120Lm/cW	3120Lm	
	30W	120Lm/cW	3600Lm	

### ON-X Low Glare Diffuser

Part Code	Power	Efficacy	Output	Kelvin
OX-TPA-WS2-6X6NW/LG	20W	120Lm/cW	2400Lm	4000K
	26W	120Lm/cW	3120Lm	
	30W	120Lm/cW	3600Lm	

### ON-X Tri-Colour Switchable Opal/Low Glare Diffuser


Part Code	Power	Efficacy	Output	Kelvin
OX-TPA-WS2-6X6TC OX-TPA-WS2-6X6TC/LG	20W	120Lm/cW	2400Lm	Tri-Colour: 3000K, 4000K & 5000K
	26W	120Lm/cW	3120Lm	
	30W	120Lm/cW	3600Lm	
Net Weight   2.5kg				

Option	Option Code
3 Hour Emergency	+ /EM
Dimming Options	See Below - Contact Office



**SILVAIR CASAMBI**

## Dimensions

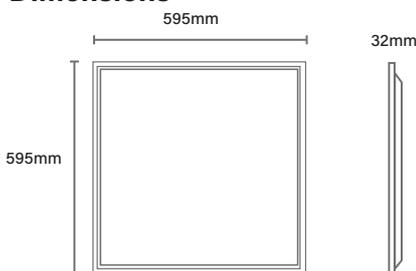

## Photometric Data

