

SPECIFICATION



# Pod-Mod

Ultra Low Glare Panel - Tri Colour  
595mmx595mm

## Technical

• Input Voltage	AC 220-240V
• Diffuser Type	Microprismatic
• Beam Spread	90°
• CRI	>85
• Power Factor	>0.9
• Typical UGR	<16
• Operating Temp.	-20°C to +45°C
• Materials	Steel
• IP Rating	IP20
• Fire Rating	TP(a)
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	412Lm



## Pod-Mod Features



Pod Optics  
(UGR<16)



TP(a)  
Fire Rating



Architectural  
Design



Tri-Colour  
(3000K/4000K/6000K)

### Pod-Mod

Part Code	Power	Efficacy	Output	Kelvin
POD-WS-6X6TC	15W	165Lm/cW	2475Lm	Tri-Colour: 3000K, 4000K & 6000K
	17W	165Lm/cW	2805Lm	
	19W	165Lm/cW	3135Lm	
	21W	165Lm/cW	3465Lm	
	23W	165Lm/cW	3795Lm	
	25W	165Lm/cW	4125Lm	
	27W	165Lm/cW	4455Lm	
	30W	165Lm/cW	4950Lm	


Net Weight | 3kg

Option	Option Code
3 Hour Emergency	+ /EM
Dimming Options	See Below - Contact Office



**SILVAIR CASAMBI**

## Dimensions

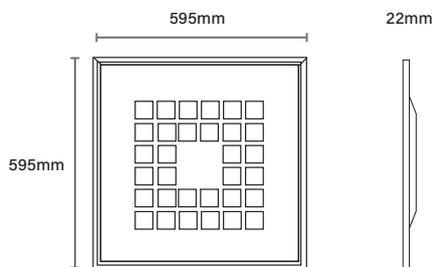

## Photometric Data

