



GlowDec

Pendant High Bay



Technical

• Input Voltage	AC 120-277V
• CRI	>80
• Beam Angle	90°
• Power Factor	>0.95
• Operating Temp.	-30 to +45°C
• Materials	Aluminium & Polycarbonate
• IP Rating	IP20
• IK Rating	IK06
• Suspension Cable	3m AC Cable/Suspension
• Dimmable	On Request
• Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	350Lm

GlowDec Features

- Dual Colour**
3000K/4000K
- Polycarbonate**
Lens
- Aluminium**
Housing
- Wattage**
Switchable

GlowDec

Part Code	Power (Selectable)	Efficacy	Output	Kelvin
GD-PRO-WS-CCT	25W	140Lm/cW	3500Lm	Dual-Colour: 3000K & 4000K
	40W	140Lm/cW	5600Lm	
	60W	140Lm/cW	8400Lm	
	80W	140Lm/cW	11200Lm	

Net Weight | 2kg

Option	Option Code
3 Hour Emergency	+ /MT/ST
Dimming Options	See Below - Contact Office




SILVAIR CASAMBI

Accessory Included



Ceiling rose and 3m suspension/mains included

Dimensions

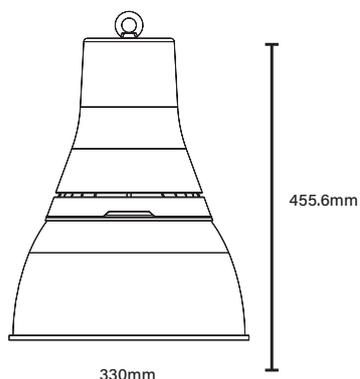

Photometric Data

