



Proteus

College Style Linear



Technical

• Input Voltage	AC 220-240V
• Diffuser Type	Microprismatic
• CRI	>85
• Power Factor	>0.98
• Operating Temp.	-20 to +65°C
• Materials	Steel & Polycarbonate
• IP Rating	IP40
• Dimmable	On Request
• Lifetime	100,000 hours, L90-B10 (Ta 25 °C)
• Emergency Output	350Lm

Proteus Features



BESA
Mounting Points



Microprismatic Diffuser
(Low Glare)



Wattage
Switchable



Conduit
Side Entry

Proteus					
Part Code	Size	Power	Efficacy	Output	Kelvin
P2-WS2-1200NW	1200mm (4ft.)	24W	140Lm/cW	3360Lm	4000K
		30W	140Lm/cW	4200Lm	
		36W	140Lm/cW	5040Lm	
		42W	140Lm/cW	5880Lm	
P2-WS2-1500NW	1500mm (5ft.)	36W	140Lm/cW	5040Lm	4000K
		44W	140Lm/cW	6160Lm	
		52W	140Lm/cW	7280Lm	
		60W	140Lm/cW	8400Lm	
P2-WS2-1800NW	1800mm (6ft.)	36W	140Lm/cW	5040m	4000K
		44W	140Lm/cW	6160Lm	
		52W	140Lm/cW	7280Lm	
		60W	140Lm/cW	8400Lm	


Net Weight	Length (A)	Ft.
3.2kg	1200mm	4ft.
4kg	1500mm	5ft.
4.8kg	1800mm	6ft.

Options	Option Code
3 Hour Emergency	+ /MT/ST
PIR Sensor	+ /PIR
Emergency & PIR Sensor	+ /PIR/MT/ST
Dimming Options	On Request




SILVAIR CASAMBI

Dimensions

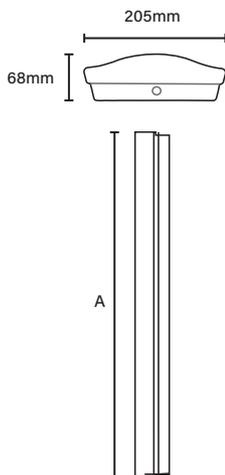

Photometric Data



Energy Efficiency Rating

